



compac

SPAIN



Fruit accumulator



Fruit accumulator

The fruit accumulator is usually used when a continuous flow of fruit to a machine is required, such as an automatic packing machine, a netbag machine or a cartons weight-filler.

The machine consists of a lower conveyor belt and two inclined side belts, located symmetrically with respect to the first.

Between the three belts there is a space to guarantee a constant flow of fruit to the machine after it.

FEATURES & BENEFITS

- Position sensors are installed to limit the position of the tray in its movement inside the accumulator, to guarantee a continuous fruit flow. A retention curtain is also installed at the exit.
- At the exit of the accumulator, a conveyor belt is installed that regulates the fruit flow in an automatic manner. It is equipped with a position detector for the presence of fruit, and works in a coordinated way with the accumulator.
- Highest quality standards to ensure long durability.



KEY SPECIFICATIONS

- Designed to comply with the Machine Directive of the European Union (CE) 2006/42/CE

- Available widths (mm):

500 / 600 / 750 / 900

- Standard lengths (mm):

2500 / 3000

- Capacity (Kg)

Width (mm)	Length (mm)
500	<u>2500</u> 140
600	175
750	210
900	250
	<u>3000</u> 175 215 260 310


OPTIONS

Exit belt optional.


TECHNICAL INFORMATION

- Power: 3 phases - 380 V - 50 Hz

- Power consumption (with exit belt):
0,74 KW

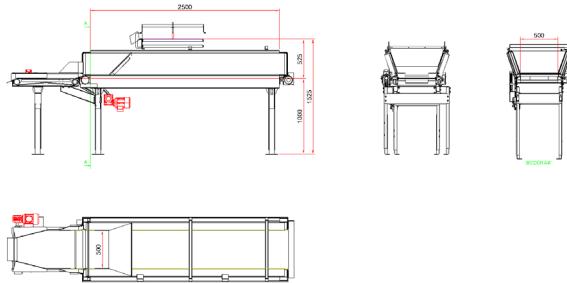

Plant view, side view and cross section of a fruit accumulator

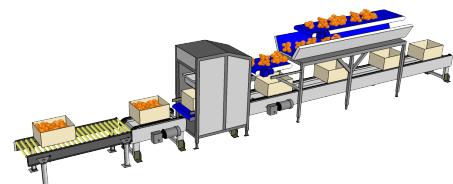

3D scheme of a box weigher-filler configuration with fruit accumulator