



Cartons diverter



Cartons diverter

This cartons diverter is used in palletizing systems of packed cartons, where a solution of 45 degrees cartons evacuation has been designed.

This solution allows us to divert the cartons from a motorized rollers conveyor directly to a palletizer, through a transfer, a control with photocell and a roller turning point.

Robust painted steel machine with adjustable legs and rollers driven by lower belts.

FEATURES & BENEFITS

- This transport system of packed cartons allows the transport of different carton sizes and material (plastic, cardboard, wood) without the intervention of any operator.
- The box diverter ensures the fulfillment of the production requirements for the palletizing line.
- Highest quality standards to ensure long durability.




Cartons diverter in a citrus packhouse

KEY SPECIFICATIONS


- Designed to comply with the Machine Directive of the European Union (CE) 2006/42/CE
- Maximum capacity: 1500 cartons/hour
- Maximum crate weight: 25 Kg

TECHNICAL INFORMATION

- Power: 3 phases - 380 V - 50 Hz
- Power consumption: 0,75 KW
- Air consumption: 4 litres/min
- Minimum height: 630 mm

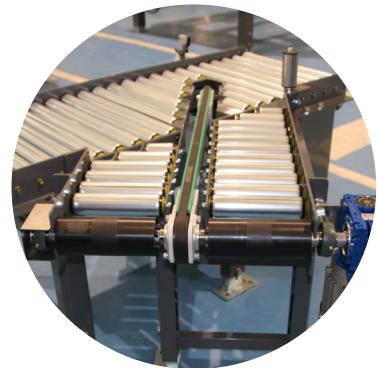

Transfer detail a cartons diverter

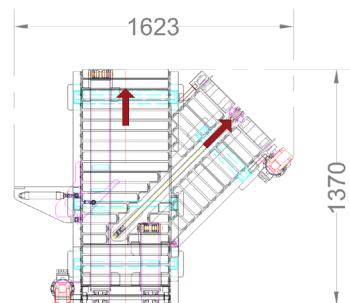

Footprint of a cartons diverter